69 mm of tarmac missing, found before the surface course went on

A 180 m adoptable estate road for a national housebuilder · Dimensure tarmac depth survey · October 2026

£13,000	3 mm	13x+	27 of 30
potential cost avoided, relaying 25 m after the surface course	core matched the survey to within 3 mm	return on a survey under £1,000	reliable points under thickness

What we found

The stone and the binder were surveyed on the same site control and one taken from the other, giving the thickness laid along both channels and the centre line, checked against the design build-up.


27 of the 30 reliable points were thin. The average was 173 mm against a 198 mm target. At chainage 150 on the centre line it was 116 mm against 185 mm: 69 mm missing. About 26.6 m³ (roughly 63 t) was net short, split by cause: 17.5 m³ tarmac laid low, 9.1 m³ stone laid high.

The proof

A core was cut at chainage 150 on the centre line, where the survey showed 116 mm. It came back within 3 mm. One hole confirmed the survey for the rest of the road.

The fix

The worst 25 m was too thin to regulate, because an overlay has to be at least about 2.5 times its aggregate size. It had to come out and be relaid: remedial work for the contractors responsible, done at binder stage, before the road was finished.

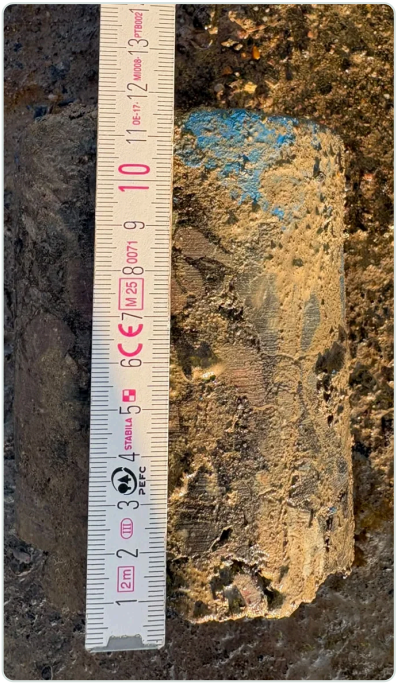

The core from chainage 150, centre line.

What finding it at binder stage was worth

FOUND AT	PUTTING IT RIGHT	POTENTIAL COST
Binder stage (what happened)	25 m x 5 m (125 m²) of base and binder relaid by the contractors responsible	No cost to the client
At adoption, after the surface course	**Same 125 m² relaid through all bound layers at ~£85/m² (£10,625), plus return visit, ironwork and traffic management (£2,500)**	**~£13,000**
Coring alone instead of a survey	The same 30 points cored at £217-£257 each, 30 holes to reinstate	£6,500-£7,700

Total £13,125, shown as about £13,000. Return = £13,000 ÷ a fee under £1,000 = over 13x. All costs are estimates based on typical 2026 UK rates, not quotes, and exclude VAT; coring rates are a published 2025 council charge. Delay to adoption, longer bonds and time spent resolving who pays are not included and would usually add to the total. Client, site and contractors not named for confidentiality.